


- High speed computer controlled network analyzer
- PCIe Bus
- Fully featured graphical software for quartz crystal, ceramic resonator and network analyzer measurements
- Extensive drive level dependency measurements at 5 ms per point
- Over 50 different crystal parameter measurements
- Precision FL measurements
- Multiple spurious sweeps
- Test fixtures available for high frequency SMD, leaded, blank, and low frequency crystals
- Custom integration with OLE
- Supports high frequency SMD reflection fixture

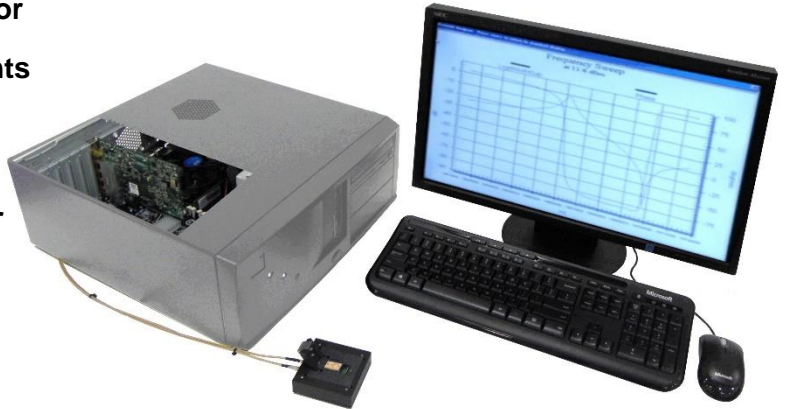

SPECIFICATIONS







Frequency Range:	15 KHz to 900 MHz
Frequency Correlation:	± 1 ppm* at series (typical)
Typical Crystal Power:	100 pW to 750 uW (1 MHz to 50 MHz) 1 nW to 500 uW (50 MHz to 200 MHz) 20 nW to 125 uW (200 MHz to 850 MHz)
Channels:	One
Controller Requirements:	Windows 10 Pro® (64-bit) with Intel uP and 1 PCIe and adjacent open slot

* Proprietary measurement and calibration algorithms provide correlation to industry standard crystal measurement equipment.

SAUNDERS & ASSOCIATES, LLC

2520 E. Rose Garden Lane - Phoenix, Arizona 85050 USA (602) 971-9977 FAX (602) 971-5522
E-Mail sales@saunders-assoc.com - World Wide Web <http://www.saunders-assoc.com>

GRAPHICAL DISPLAYS

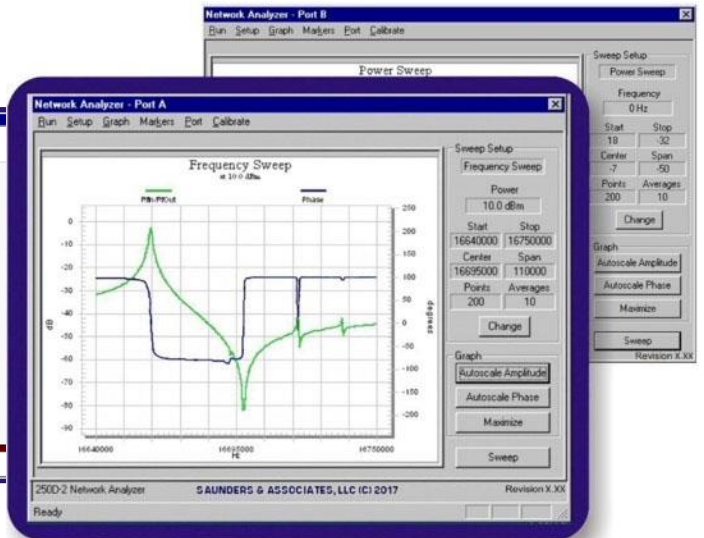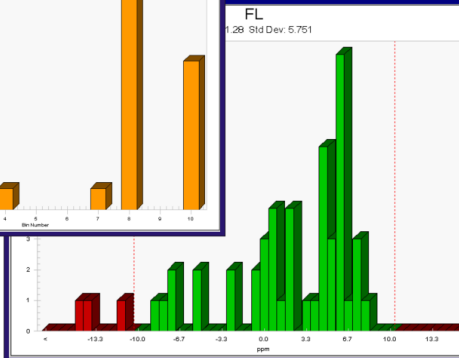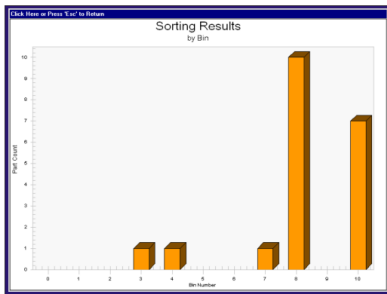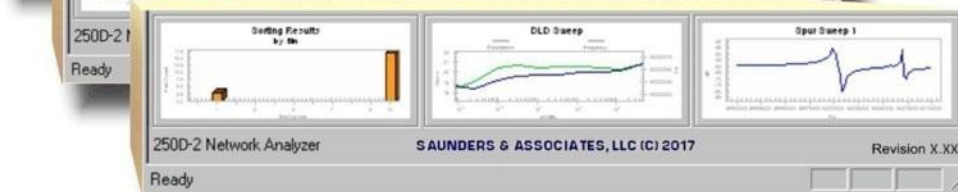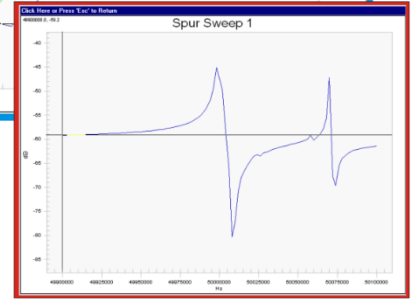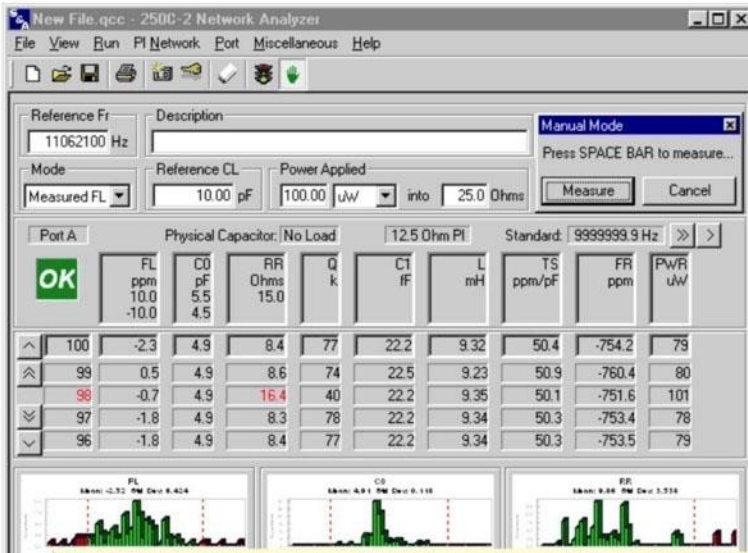

SAUNDERS & ASSOCIATES, LLC