

DE FACTO INDUSTRY STANDARD CRYSTAL MEASUREMENT SYSTEM WITH OVER 6,000 UNITS IN USE WORLDWIDE

- High speed computer controlled network analyzer
- Fully featured graphical software for quartz crystal, ceramic resonator and network analyzer measurements
- Extensive drive level dependency measurements at 10 ms per point
- Over 50 different crystal parameter measurements
- Precision FL measurements
- Multiple spurious sweeps
- Test fixtures available for SMD, leaded, blank, and low frequency crystals
- All data is published in an ODBC compatible data base in real time
- Custom printouts can be created using *Crystal Reports*[®] (optional)
- Optional custom integration with OLE, RS-232 and BCD interfaces
- Upgradeable to a 250C 500 MHz Network Analyzer



SPECIFICATIONS







Frequency Range:	15 KHz to 220 MHz
Frequency Correlation:	± 1 ppm* at series (typical)
Crystal Power:	100 pW to 1000 uW (1 MHz to 50 MHz) 1 nW to 500 uW (>50 MHz)
Channels:	Two
Controller Requirements:	<i>Windows XP Pro</i> [®] (32-bit) with Intel uP and full PCI slot -or- <i>Windows 10 Pro</i> [®] (64-bit) with Intel uP and full PCI slot

* Proprietary measurement and calibration algorithms provide correlation to industry standard crystal measurement equipment.

SAUNDERS & ASSOCIATES, LLC

2520 E. Rose Garden Lane - Phoenix, Arizona 85050 USA (602) 971-9977 FAX (602) 971-5522
E-Mail sales@saunders-assoc.com - World Wide Web <http://www.saunders-assoc.com>

GRAPHICAL DISPLAYS

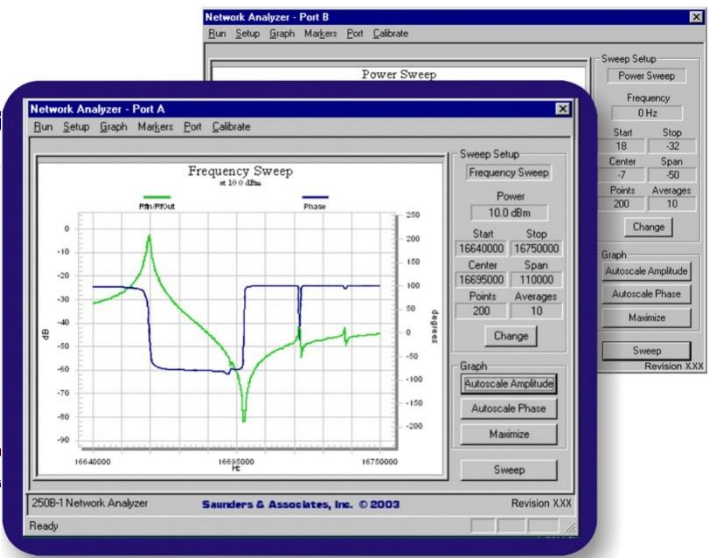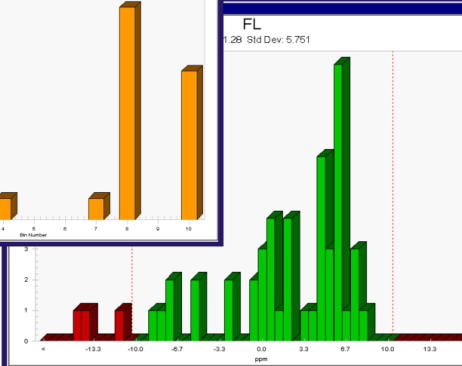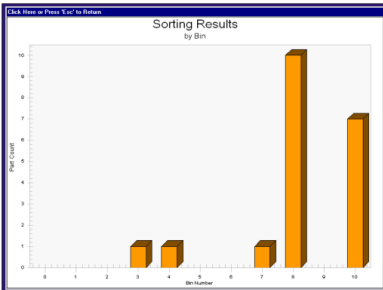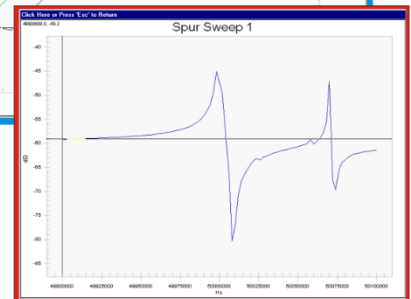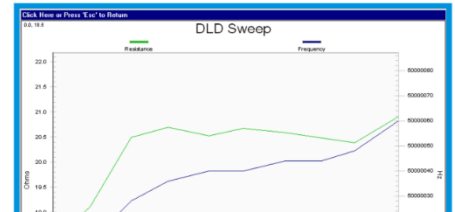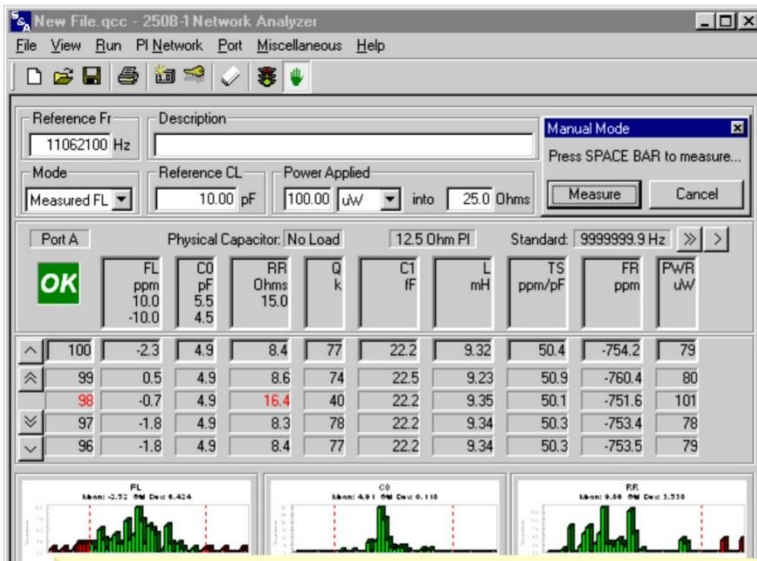

SAUNDERS & ASSOCIATES, LLC