




## T-714 DUAL ROW CRYSTAL TEST WHEEL

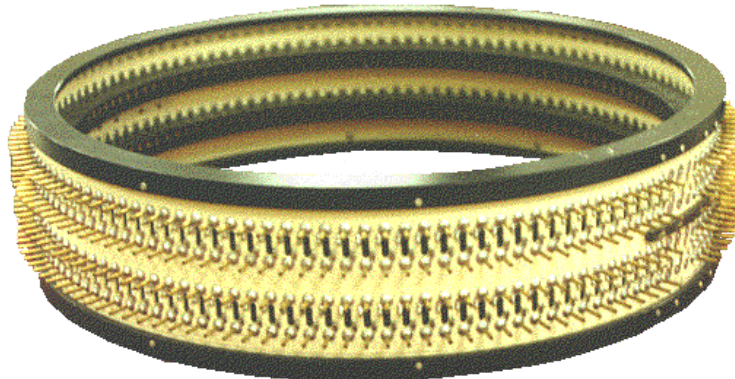

- 127 useable device locations per row (254 total)
- Wide entry crystal sockets for ease of loading
- Crystal leads contacted 2mm below can base
- Heavy duty contact rivets for extended life

### Crystal Specification Ranges

Lead Spacing:	0.100" - 0.200"
Lead Diameter:	0.012" - 0.018"
Lead Length:	0.250" - 1.000"

(3 lead HC-45 crystals through HC-49 family crystals)

## SAUNDERS & ASSOCIATES, LLC

2520 E. Rose Garden Lane - Phoenix, Arizona 85050 USA (602) 971-9977 FAX (602) 971-5522  
E-Mail [sales@saunders-assoc.com](mailto:sales@saunders-assoc.com) - World Wide Web <http://www.saunders-assoc.com>