



- High frequency range
1 MHz — 900 MHz
- 50 Ohm fixture impedance
- Includes calibration adapter
- Standard part adapters accommodate various SMD packages

Examples include:

1.0 mm x 0.8 mm
1.2 mm x 1.0 mm
1.6 mm x 1.0 mm
1.6 mm x 1.2 mm
2.0 mm x 1.2 mm
2.0 mm x 1.6 mm
2.5 mm x 2.0 mm
3.2 mm x 1.5 mm
3.2 mm x 2.5 mm
5.0 mm x 3.2 mm
5.0 mm x 7.0 mm
6.0 mm x 3.5 mm

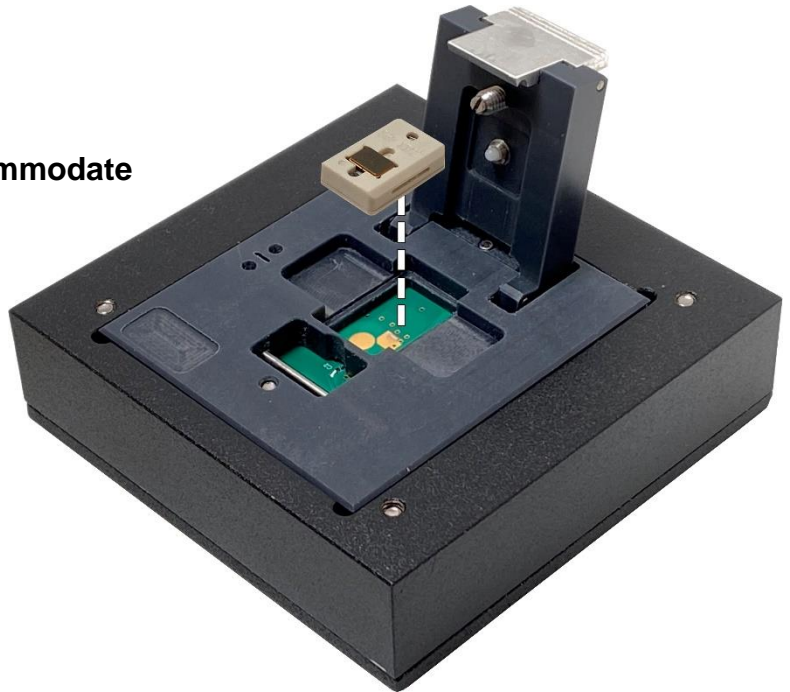

- Custom part adapter sizes available

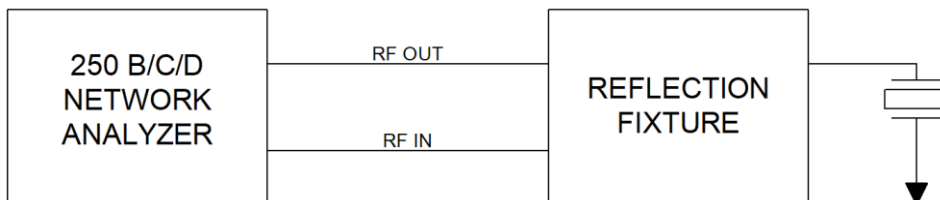

SAUNDERS & ASSOCIATES, LLC

2520 E. Rose Garden Lane - Phoenix, Arizona 85050 USA (602) 971-9977 FAX (602) 971-5522
E-Mail sales@saunders-assoc.com - World Wide Web <http://www.saunders-assoc.com>